


## Submersible Pump Console

(EM02)



Submersible pump console is used for controlling the submersible pumps.

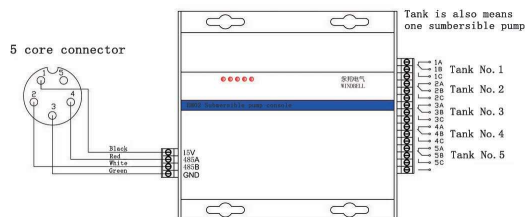


It designed to stop fueling when no oil storage in tank.

It works with SS series console. Once the product level reaches to the preset alarm level in console, the submersible pump console will automatically cut off the power circuit of submersible pump, so to stop fueling into cars, protect all relative equipment like pipes, fuel dispenser and cars.

### Technical Parameters

- Voltage: DC15V
- Current: 50mA  
Maximum 300mA when all relays working
- Communication port: RS485
- Relay output: 5 groups  
(normal open or close contacts)  
AC250V/3A; DC30V/3A
- Enclosure dimension:  
15.5(L)\*14.8(H)\*3.5(W)cm  
6.1''\* 5.8'' \* 1.4''

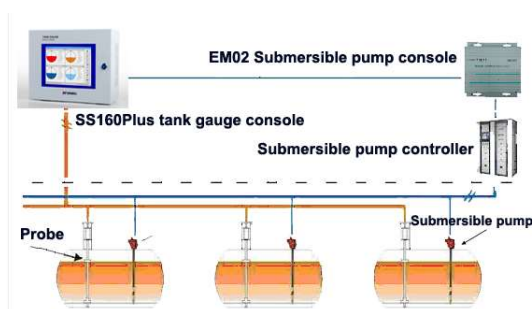

WINDBELL Measurement and Control  
 No.9 Changchun Road, High-Tech developme  
 nt Zone, Zhengzhou, China  
 Tel/Fax: +86 371 6030 1609; 6030 1612

[emily@windbelltek.com](mailto:emily@windbelltek.com)

[www.windbellgauge.com](http://www.windbellgauge.com)

October 2016