

Tank-side Display




The tank-side display directly connect with ATG console or forecourt console, can clearly display oil product level, water level and product temperature on LCD screen.

Features

- RS485 communication
- Microcontroller technology
- Superior SMD techniques
- Easy to install
- Longer lifetime
- Strong adaptability of temperature and humidity in various environments.
- Show fuel liquid height in storage
- Applied to gasoline, diesel, kerosene
- Explosion proof, safe to install and work at Area 1

Power	DC12V±25%, 25mA
Display	128*64 LCD screen
Resolution	Oil level: 0.1mm; temperature: 0.01°C
Response time	<3s
Environment temperature	-40°C~60°C (-40 to 140F)
Relative humidity	<98%
Explosion proof mark	[EXia] II AT4 Ga
Intrinsically features	Power terminal to Earth: Ui=12.6; li=291mA; Pi=0.92W; Ci=0.42μF; Li=0 Signal terminal to Earth: Ui=7.14V; li=147mA; Pi=260mW; Ci=0μF; Li=0
Protection grade	IP 65
Suitable cables	≥1.5mm ² ×4
Maximum communicate distance	≤1000m
Enclosure dimension	14*16.5*9.15cm (5.5'' * 6.5'' * 3.6'')
Weight	1.50kg

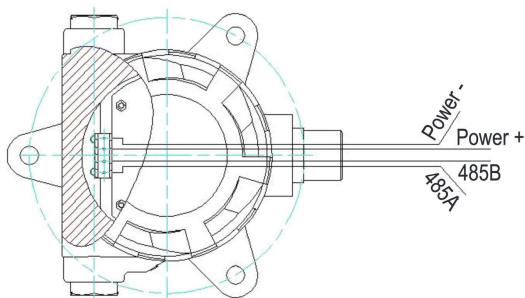

Zhengzhou Windbell Measurement and Control Technology Co., Ltd
 No.9 Changchun Road, High-Tech Industrial Development Zone,
 Zhengzhou city, Henan Province, China
 Tel: +86 371 6030 1609;
 Fax: +86 371 6030 1612
sales@windbelltek.com
www.windbellgauge.com

October 2016